



Commissioner dali

Category

- Test Equipment: DALI

Description

- Hand-held tool for testing, programming and configuring DALI lighting installations/fixtures.

Mechanical

- Housing: Hand-held case in flame retardant ABS (UL94V-0)
- Overall Dimensions: 95mm (h) x 65mm (w) x 28mm (d)
- Mass: 0.1 kg
- Country of manufacture: UK

Environmental

- Operating temperature: 0°C to 40°C
- Storage temperature: -10°C to +50°C
- Operating relative humidity (max): 80% non-condensing
- IP rating: IP20 indoor use only
- Certification: CE, UKCA, WEEE, RoHS
- Warranty: 2-year (return to base)

Power & Electrical

- Power
 - 2 x AA batteries (rechargeable compatible)
- Programmable power-off timer

User Interface / Display

- 8 button control panel
- 40-character LCD display



Control Protocols

- DALI input / output

Signal Connections

- RCA jack (phono) for DALI (phono to croc-clip test lead included)

Configuration options include:

- DALI
 - Commission devices
 - Re-address devices
 - Read and write all DALI commands
 - Edit groups
 - Edit & record scenes
 - Record max, min, fail and power-on states
 - Control individual levels (ARC)
 - Control Device Type 8 colour
 - Set range of levels
 - Auto-fade and walk test
 - Test Bus power and line shorts
 - View data levels
 - View protocol data


Artistic Licence



Ordering information

- Product code: Commissioner dali
- Accessories (included):
 - Phono to croc-clip lead
 - 2 x rechargeable AA batteries (NiMH)

Technical drawing

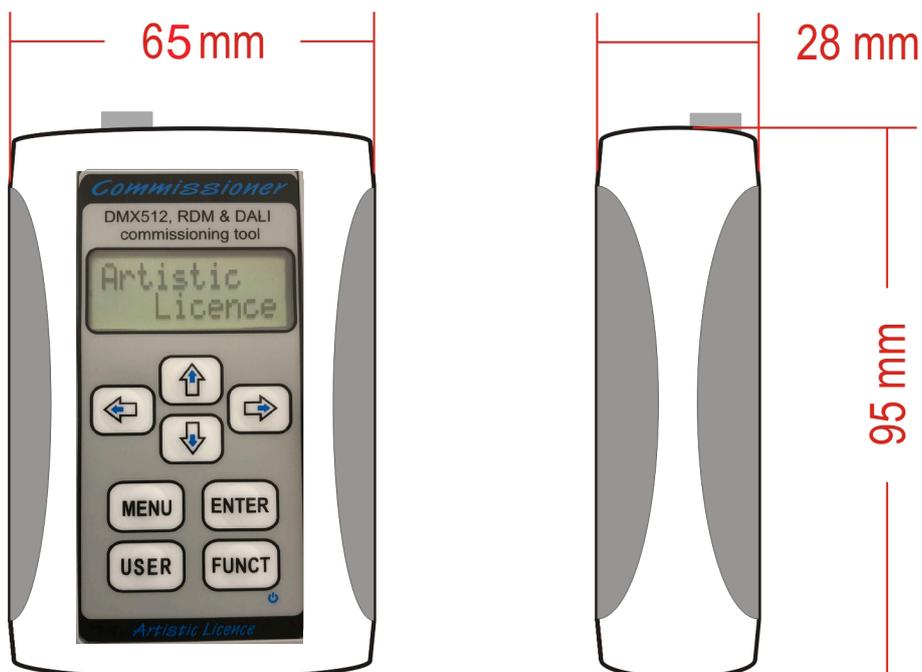

The Mould Making Workshop
Soby Mews
Bovey Tracey
TQ13 9JG
United Kingdom

Telephone: +44 (0) 20 8863 4515
Email: sales@ArtisticLicence.com
Service: support@ArtisticLicence.com
Web: www.ArtisticLicence.com

Due to our policy of continuing product improvement specifications are subject to change without notice.

All products are covered from date of purchase by a 2-year return to base warranty.

Artistic Licence

Commissioner dali