



## Rail-Flip

### Category

A) DMX Splitters & Wireless DMX

### Description

4 Universe DMX512 Fail-Over Switch



### Mechanical

- Housing: DIN Rail Case
- Material: Lexan Plastic - UL94-V0 rated
- Overall Dimensions: 159mm / 9M (W) x 90mm (H) x 73.5mm (D)
- Mass: 0.45kg
- Mounting: 35mm DIN Rail or Surface Mount
- Country of Manufacture: United Kingdom

### Power & Electrical

- Input Voltage: 9-48 VDC
- Input Connector: (1) 4-pin screw terminal
- Input Power (max): 8W
- Duty Cycle: 80% @ 25°C
- DC fuse: internal resettable fuse for control electronics

### Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE FCC, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

### Connections

- DMX input: (8) 3-pin screw terminal
- DMX output: (4) 3-pin screw terminal
- Remote Switch: (1) 2-pin screw terminal

### Control

- Universes: 4
- Protocols: DMX512, DMX512 (1990), DMX512-A, RDM V1.0 (E1.20 - 2006 ESTA Standard)

### Configuration & Indication

- Switch selector: (A / B / Auto)
- Remote switch
- LED: Switch setting & output activity

### Package Contents

- Rail-Flip
- User Guide


### Ordering Info

Product Code: Rail-Flip


Accessories: PSU-9-1.5-FER, PSU-24-2.5-DR



Mounting Drawing

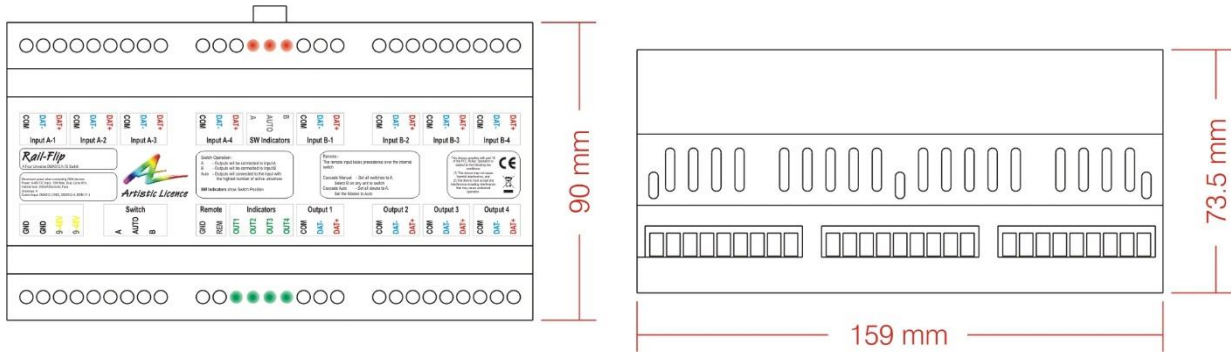

Application Drawing

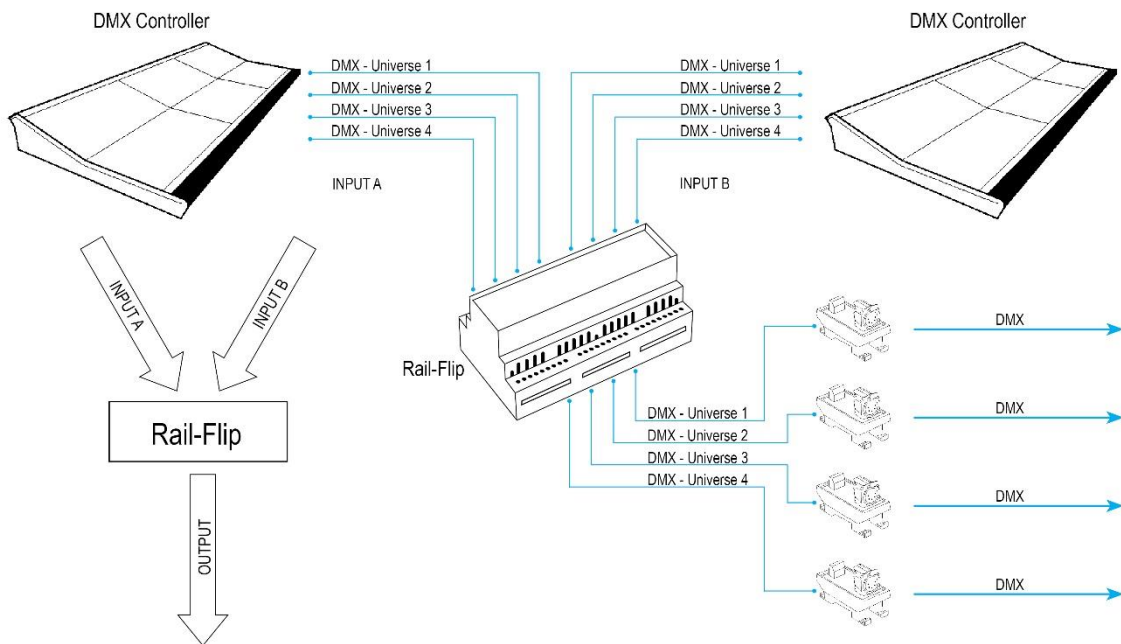

[www.ArtisticLicence.com](http://www.ArtisticLicence.com)

Artistic Licence, The Mould Making Workshop  
Soby Mews, Bovey Tracey, TQ13 9JG, UK

Sales@ArtisticLicence.com  
Support@ArtisticLicence.com  
Tel: +44 (0) 20 8863 4515

*Due to our policy of continuing product improvement specifications are subject to change without notice*

